

Description

Part no.
Article no.Price
see price list

Std. pack

easy Connect SmartWire Gateway

Gateway for connecting up to 16 SmartWire modules to easy-NET or CANopen

EASY223-SWIRE
106950

1 off




Notes

Mode of operation, easy-NET


In easy-NET mode the gateway acts as a station on easy-NET and the SmartWire master at the same time. Up to 8 stations on the easy-NET can be intelligently connected with each other.

CANopen operating mode

CANopen mode allows communication between SmartWire modules and controllers with CANopen interface such as EC4-200 or XC100/200. In addition to standard fieldbus modules such as remote I/O systems or visualisation devices, this allows a number of switchgear devices to be networked directly with the PLC. Up to 126 stations can be connected to a CANopen network, depending on the performance level of the CANopen fieldbus master.

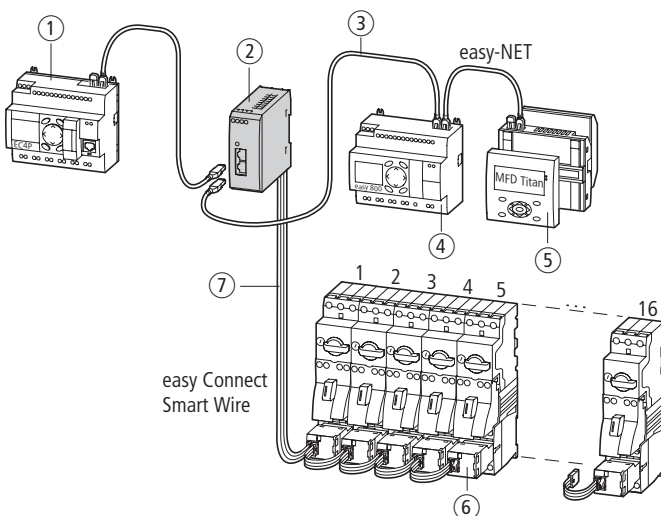

- ① Head-end controller (EASY8..., MFD-CP8-NT, EC4P..., XC201)
- ② easy Connect SmartWire gateway → page 4/44
- ③ easy-NET → page 4/45
- ④ easy-NET station, e.g. easy800 → page 4/34
- ⑤ easy-NET station, e.g. MFD-CP8-NT → page 4/38
- ⑥ SmartWire module, e.g. for XStart → page 9/29
- ⑦ SmartWire connection cable → page 9/29

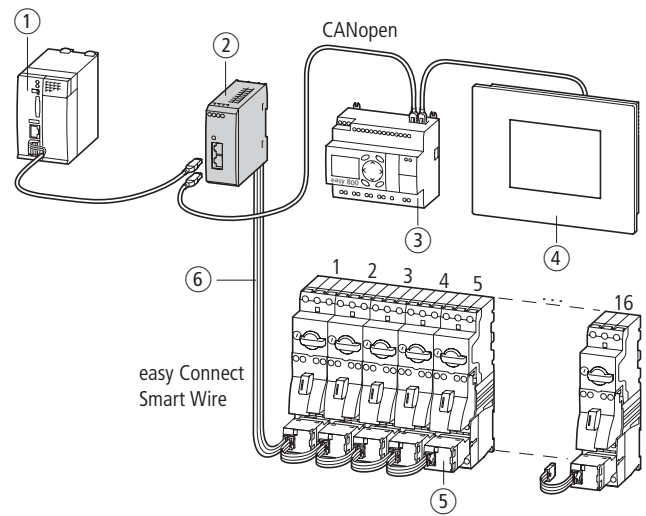

- ① CANopen PLC e.g. EC4P, XC100/XC200 → page 4/82
- ② easy Connect SmartWire gateway → page 4/44
- ③ CANopen PLC e.g.: EC4P-200 → page 4/42
- ④ CANopen station, e.g. MI4 → page 4/103
- ⑤ SmartWire module, e.g.: for XStart → page 9/29
- ⑥ SmartWire connection cable → page 9/29