


SL signal towers

Rated operational voltage U_e	Number of modules	Colour	Part no. Article no.	Price see price list	Std. pack
V	Quantity				

IP54 complete units

Basic module with stand and 100 mm spacer including filament bulb
Continuous light

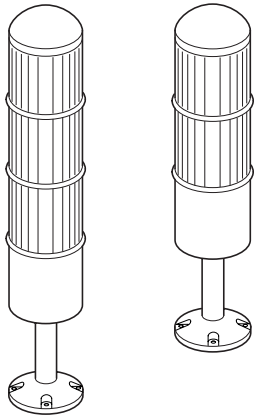

24 V AC/DC	3		SL-100-L-RYG/24 205352		1 off
24 V AC/DC	2		SL-100-L-RG/24 205354		1 off

Customized complete units

To order use form FO315, → Electronic Catalogue: RMQ16 → Product profile → Product information
(*) = Freely selectable customer identification or stock no.;

-			SL-COMBINATION-* 229655		1 off
---	--	--	-----------------------------------	--	-------

Colour	Part no. Article no.	Price see price list	Std. pack	Notes
--------	-------------------------	-------------------------	-----------	-------

Base module

Black, with top cover

	With screw terminals		SL-B 205311	1 off
	With Cage Clamp		SL-CB 218483	
	with AS-Interface connection		SL-B-ASI 222174	

Cage Clamp is a registered trademark of Wago Contact Technik GmbH, Minden, Germany
Base module (printed circuit board in base enclosure with 3 outputs):
































- Power supply completely from AS-Interface (max. 250 mA) with 2-way screw terminal
- Combination of 3 surface mounting modules with various functions (continuous-, flashing-, strobe light and acoustic indicator)
- Status LEDs
- Order surface mounting modules separately

Continuous light module

Without filament bulbs



	SL-L-W 205312	1 off
	SL-L-R 205313	
	SL-L-G 205314	
	SL-L-Y 205315	
	SL-L-B 205316	

	Rated operational voltage	Colour	Part no. Article no.	Price see price list	Std. pack
	U_e				
	V				
Flashing light module					
Without filament bulb, $f \approx 1$ Hz					
	24 V AC/DC (+10 %/-15 %)		SL-BL24-W 205317		1 off
			SL-BL24-R 205318		
			SL-BL24-G 205319		
			SL-BL24-Y 205320		
			SL-BL24-B 205321		
	110 ... 130 V AC		SL-BL130-W 205322		
			SL-BL130-R 205323		
			SL-BL130-G 205324		
			SL-BL130-Y 205325		
			SL-BL130-B 205326		
	230 V AC		SL-BL230-W 205327		
			SL-BL230-R 205328		
			SL-BL230-G 205329		
			SL-BL230-Y 205330		
			SL-BL230-B 205331		
Acoustic indicator module, IP20					
	Continuous tone $f = 2750$ Hz	12 ... 36 V AC/DC 8 ... 12 mA		SL-A24 205341	1 off
	Continuous tone $f = 2750$ Hz	110 ... 230 V AC/DC 4 ... 8 mA		SL-A110-230 205342	
	Pulsed tone: 5 Hz with $f = 2750$ Hz	12 ... 36 V AC/DC 8 ... 12 mA		SL-AP24 205343	
	Pulsed tone: 5 Hz with $f = 2750$ Hz	110 ... 230 V AC/DC 4 ... 8 mA		SL-AP110-230 205344	
Strobe light module					
With flash tube, 1 Ws, $f \approx 1$ Hz					
	24 V AC/DC (+10 ... -15 %) I_{emax} : 190 mA		SL-FL24-W 205332		1 off
			SL-FL24-R 205333		
			SL-FL24-Y 205334		
	110 ... 130 V AC I_{emax} : 31 mA		SL-FL130-W 205335		
			SL-FL130-R 205336		
			SL-FL130-Y 205337		
	230 V AC I_{emax} : 28 mA		SL-FL230-W 205338		
			SL-FL230-R 205339		
			SL-FL230-Y 205340		

SL signal towers

