




Motor-protective circuit-breakers


Max. motor rating			Rated uninterrupted current	Setting range		Screw terminals		Std. pack
AC-3				Overload releases	Short-circuit releases	Part no. Article no.	Price see price list RG	
220 V	380 V	440 V						
230 V	400 V							
240 V	415 V							
<i>P</i>	<i>P</i>	<i>P</i>	<i>I_u</i>	<i>I_r</i>	<i>I_{rm}</i>			
kW	kW	kW	A	A	A			
								

Motor-protective circuit-breakers, Type "1" and Type "2" coordination



-	-	-	0.16	0.1...0.16	2.2	PKZM01-0,16 278475	1 off
-	0.06	0.06	0.25	0.16...0.25	3.5	PKZM01-0,25 278476	
0.06	0.09	0.12	0.4	0.25...0.4	5.6	PKZM01-0,4 278477	
0.09	0.12	0.18	0.63	0.4...0.63	8.8	PKZM01-0,63 278478	
0.12	0.25	0.25	1	0.63...1	14	PKZM01-1 278479	
0.25	0.55	0.55	1.6	1...1.6	22	PKZM01-1,6 278480	
0.37	0.75	1.1	2.5	1.6...2.5	35	PKZM01-2,5 278481	
0.75	1.5	1.5	4	2.5...4	56	PKZM01-4 278482	
1.1	2.2	3	6.3	4...6.3	88	PKZM01-6,3 278483	
2.2	4	4	10	6.3...10	140	PKZM01-10 278484	
3	5.5	5.5	12	8...12	168	PKZM01-12 278485	
4	7.5	9	16	10...16	224	PKZM01-16 283390	

Notes

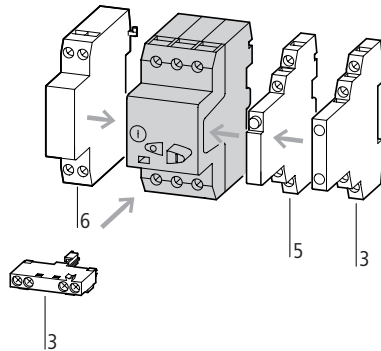

Accessories

- 3 Standard auxiliary contact
- 5 Trip-indicating auxiliary contact
- 6 Shunt release, undervoltage release

Page

- 8/8
- 8/11
- 8/11

Single-phasing sensitivity according to IEC/EN 60947-4-1, VDE 0660 Part 102.
Can be snap-fitted to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height

