



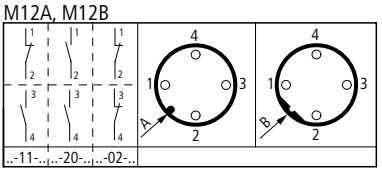



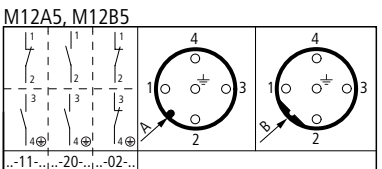




For use with	Description	Part no. Article no.	Price see price list	Std. pack	Notes
M20 screw terminal M20 in 1/2"					
	for use with american pipe thread, metal	V1/2"/M20-NA 225269		10 off	The screw connection must be earthed, not total insulation
	for use with american pipe thread, moulded material	V1/2"/M20 225270		10 off	
M20 diaphragm bolt, IP65					
With integral push-through membrane External diameter of cable up to 13 mm IP65 with cable inserted		EMS20 225271		25 off	
M20 screw closure (self-sealing grommet) For tightening / loosening by using a standard wrench for sealing grommet plugs					
		LS-X20 266134		25 off	
Plug connector, M12 × 1, IP65					
Moulded $U_i = 250 \text{ V}$, $I_{th} = 4 \text{ A}$ Fuse: 6 A gG/gL					
4-pole $U_e = 250 \text{ V}$					
	LS	"A" coded  Standard in IEC/EN 60947-5-2	M12A 266135	10 off	
	LS	"B" coded 	M12B 266136	10 off	
5-pole $U_e = 125 \text{ V}$					
	LSM	"A" coded  Standard in IEC/EN 60947-5-2	M12A5 272202	10 off	
	LSM	"B" coded 	M12B5 272203	10 off	
Cage Clamp twin N/C contact					
		LS-XTW 290179		1 off	

Position switch

