

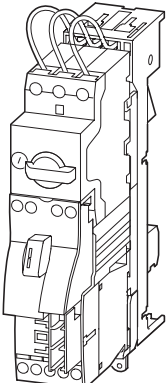
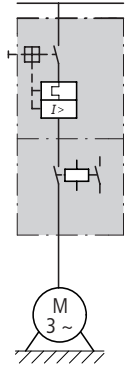
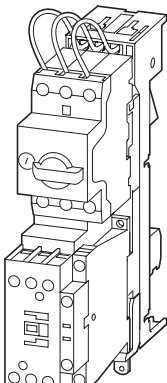
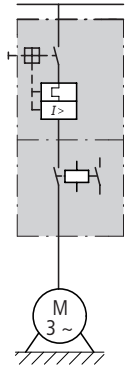


Starter on busbar adapter

Starter on busbar adapter

Contact sequence	Motor ratings			Setting range			Part no. Article no.	Price see price list	Motor starter actuating voltage 230 V 50 Hz	Part no. Article no.	Price see price list	Std. pack	Motor-protective circuit-breakers Part no.	Contactor Part no.	Wiring set, DOL starter Mechanical connection module and electrical contact module Part no.	Busbar adapter Part no.	Notes	
	Motor rating	Rated operational current 400 V	Rated short-circuit current 380 – 415 V	Overload releases	Short-circuit releases	Coordination												
AC-3	I_e	I_q																
380 V 400 V 415 V	A	kA																
P	I_e	I_q		I_r	I_{rm}													
kW	A	kA																

Complete devices PKZ and DIL on BBA

		0.06	0.21	100	0.16...0.25	3.5	"1", "2"	MSC-D-0,25-M7(230V50HZ)/BBA 102737	MSC-D-0,25-M7(24VDC)/BBA 102964	1 off	PKZM0-0,25	DILM7-10	PKZM0-XDM12	BBA0-25	The DOL starter (complete) consists of a PKZM0 motor-protective circuit-breaker and a DILM contactor. This combination is mounted on the busbars. The connection of the main circuit between PKZ and contactor is established with electrical contact modules.
		0.09	0.31	100	0.25...0.4	5.6		MSC-D-0,4-M7(230V50HZ)/BBA 102738	MSC-D-0,4-M7(24VDC)/BBA 102965		PKZM0-0,4	DILM7-10	PKZM0-XDM12		
		0.12 0.18	0.41 0.6	100	0.4...0.63	8.82		MSC-D-0,63-M7(230V50HZ)/BBA 102739	MSC-D-0,63-M7(24VDC)/BBA 102966		PKZM0-0,63	DILM7-10	PKZM0-XDM12		
		0.25	0.8	100	0.63...1	14		MSC-D-1-M7(230V50HZ)/BBA 102950	MSC-D-1-M7(24VDC)/BBA 102967		PKZM0-1	DILM7-10	PKZM0-XDM12		
		0.37 0.55	1.1 1.5	100	1...1.6	22.4		MSC-D-1,6-M7(230V50HZ)/BBA 102951	MSC-D-1,6-M7(24VDC)/BBA 102968		PKZM0-1,6	DILM7-10	PKZM0-XDM12		
		0.75	1.9	100	1.6...2.5	35		MSC-D-2,5-M7(230V50HZ)/BBA 102952	MSC-D-2,5-M7(24VDC)/BBA 102969		PKZM0-2,5	DILM7-10	PKZM0-XDM12		
		1.1 1.5	2.6 3.6	100	2.5...4	56		MSC-D-4-M7(230V50HZ)/BBA 102953	MSC-D-4-M7(24VDC)/BBA 102970		PKZM0-4	DILM7-10	PKZM0-XDM12		
		2.2	5	100	4...6.3	88.2		MSC-D-6,3-M7(230V50HZ)/BBA 102954	MSC-D-6,3-M7(24VDC)/BBA 102971		PKZM0-6,3	DILM7-10	PKZM0-XDM12		
		3	6.6	100	6.3...10	140	"1"	MSC-D-10-M7(230V50HZ)/BBA 102955	MSC-D-10-M7(24VDC)/BBA 102972		PKZM0-10	DILM7-10	PKZM0-XDM12		
		4	8.5	100	6.3...10	140		MSC-D-10-M9(230V50HZ)/BBA 102956	MSC-D-10-M9(24VDC)/BBA 102973		PKZM0-10	DILM9-10	PKZM0-XDM12		
5.5	11.3	100	8...12	168		MSC-D-12-M12(230V50HZ)/BBA 102957	MSC-D-12-M12(24VDC)/BBA 102974	PKZM0-12	DILM12-10	PKZM0-XDM12					
7.5	15.2	50	10...16	224		MSC-D-16-M15(230V50HZ)/BBA 102958	MSC-D-16-M15(24VDC)/BBA 102975	PKZM0-16	DILM15-10	PKZM0-XDM12					
		3	6.6	100	6.3...10	140	"1", "2"	MSC-D-10-M17(230V50HZ)/BBA 102959	MSC-D-10-M17(24VDC)/BBA 102976	PKZM0-10	DILM17-10	PKZM0-XM32	BBA0-32		
		4	8.5	100	6.3...10	140		MSC-D-12-M17(230V50HZ)/BBA 102960	MSC-D-12-M17(24VDC)/BBA 102977	PKZM0-12	DILM17-10	PKZM0-XM32			
		5.5	11.3	100	8...12	168		MSC-D-16-M17(230V50HZ)/BBA 102961	MSC-D-16-M17(24VDC)/BBA 102978	PKZM0-16	DILM17-10	PKZM0-XM32			
		7.5	15.2	50	10...16	224		MSC-D-25-M25(230V50HZ)/BBA 102962	MSC-D-25-M25(24VDC)/BBA 102979	PKZM0-25	DILM25-10	PKZM0-XM32			
		11	21.7	50	20...25	350		MSC-D-32-M32(230V50HZ)/BBA 102963	MSC-D-32-M32(24VDC)/BBA 102980	PKZM0-32	DILM32-10	PKZM0-XM32			